



**ULTRAFILTER**  
THE FILTRATION MANUFACTURER

*Kronsbein ultrafilter*®



**Process filter P-SRF  
sterile depth filter  
for process air & gases**

# P-SRF sterile filter

## Ultrafilter P-SRF

The P-SRF is a wounded depth filter with inner and outer guard end caps made of stainless steel. Consisting of a three-dimensional borosilicate depth media, the P-SRF achieves a void volume of 95 %, ensuring a high containment capacity at high flow rates and low differential pressure. A retention rate of > 99.99998 % related to 0.2 µm is achieved during operation.

All components meet the FDA requirements for the contact with food in accordance with the CFR requirements (code of federal regulations) title 21 and EC/1935/2004.

## Features and advantages

- Non-fiber releasing filter element
- Manufactured with use of acrylic binder and without chemical additives.

- Corresponds to cGMP requirements (current Good Manufacture Practice) and is manufactured according to DIN EN ISO 9001.
- P-SRF has passed the toxicological test according to USP XX Class VU for plastics.

## Applications

- Aseptic packing
- Biotechnology
- Breweries
- Chemical Industry
- Dairies
- Fermentation processes
- Food and beverages
- Pharmaceutical Industry
- Water treatment systems

Features	Benefits
Outer guard and endcaps made of stainless steel	High mechanical and thermal stability, good durability against chemicals and numerous aggressive gases.
Absolute retention rate of 99.99998% related to 0.2 µm	Validated retention rate, integrity testable with DOP test according to HIMA
Three-dimensional borosilicate depth filter media	High waste containment capacity, low differential pressure, high flow rate
Biologically and chemically inert	No breeding ground for separated microorganism
200 sterilization cycles guaranteed	High economical efficiency and low filtration costs
100% integrity tested	Guaranteed quality
Available in 13 sizes	Optimum filter size for individual application
Stainless steel core and end-caps	Temperature range from -20 °C up to 200 °C

Materials	
Filter media	Borosilicate
Outer core	SS 1.4301
Inner core	SS 1.4301
Inner layer	Polyester
End caps	SS 1.4301
Bonding material	Silicone
Seals	EPM (Std.), FEPM (Fluoraz) on request



Kronsbein ultrafilter®

# P-SRF sterile filter

## Bacterial retention:

LRV > 7/cm<sup>2</sup> for viruses and phages

## Filtration surface:

494 cm<sup>2</sup> per 10" Element (10/30) (250 mm)

## Temperature range:

-20 °C to 200 °C

## Absolute retention rate:

99.99998 % related to 0.2 µm

## Sterilization:

In-line sterilization with slow speed saturated steam:  
 max. 121°C for 30 minutes  
 max. 131°C for 20 minutes  
 max. 141°C for 10 minutes

Autoclave: 125°C for 30 minutes



P-SRF-N filter elements are guaranteed for 200 sterilization cycles without loss of integrity.

## Max. differential pressure:

5 bar, independent of operating pressure of flow direction.

## Dimensions

element size	A mm	B mm	Ø C mm	Ø D mm	correction factor
03/10	76	12	3/4"	42	0,12
04/10	104	12	3/4"	42	0,17
04/20	104	14	1"	52	0,19
05/20	104	14	1"	52	0,19
05/25	128	14	1"	62	0,32
05/30	128	16	2"	86	0,46
07/25	180	14	1"	62	0,47
07/30	180	16	2"	86	0,68
10/30	254	16	2"	86	1,00
15/30	381	16	2"	86	1,55
20/30	508	16	2"	86	2,10
30/30	762	16	2"	86	3,28
30/50	762	16	2"	140	5,89

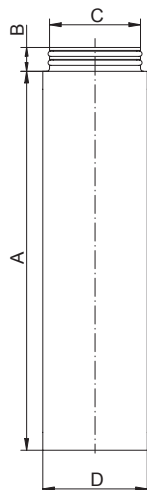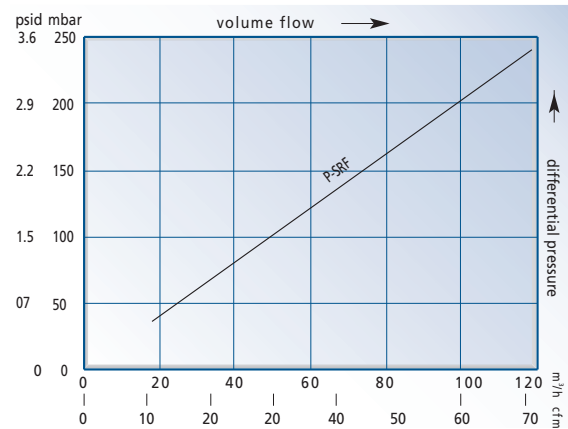

Technical Alternations reserved



ultrafilter gmbh

Otto-Hahn-Str. 1 • 40721 Hilden • Germany

Tel: +49 (0) 21 03.33 36 0 • Fax +49(0)21 03.33 36 36

e-Mail: info@ultra-filter.de • www.ultra-filter.de

**ultrafilter GmbH**

Otto-Hahn-Str. 1  
40721 Hilden  
Tel. +49 (0) 2103 33 36 0  
Fax: +49 (0) 2103 33 36 36  
eMail: info@ultra-filter.de  
www.ultra-filter.de

**ultra.air AG**

Leutschenbachstrasse 45  
8050 Zürich / Schweiz  
Tel. +41 (0) 44 224 6060  
Fax: +41 (0) 44 224 6061  
eMail: info@ultraair.ch  
www.ultraair.ch

**ultrafilter S.A. Mexico**


Tlalnepantla, Estado de México  
Tel. +55 5362 8452  
Fax: +55 5361-5444  
eMail: contacto@solvik-int.com  
www.solvik-int.com

**ultra.air GmbH**

Im Hülsenfeld 13  
40721 Hilden  
Tel. +49(0)2103 33 36 0  
Fax: +49(0)2103 33 36 36  
eMail: info@ultraair.de  
www.ultraair.de

**ultra.air AG**

Leutschenbachstrasse 45  
8050 Zürich / Schweiz  
Tel. +41 (0) 44 224 6060  
Fax: +41 (0) 44 224 6061  
eMail: info@ultraair.ch  
www.ultraair.ch

**ultrafilter USA Inc.**

Denver CO, USA  
Tel. +1 (303) 321 3809  
Fax +1 (720) 979 9640  
eMail: info@ultrafilter.us  
eMail: mike.lewis@ultra-filter.us  
www.ultra-filter.us

**ultrafilter Ltd.  
China**

Room 201, Xueyuan Road 16#  
100083 Haidian Distric  
Beijing • P.Republic of China  
Tel. +86 10 8333 0822  
Fax: +86 10 8115 9861  
eMail: csfinox@yahoo.com.cn

**ultrafilter Ltd.  
South Africa**

Artic Driers  
12 Rotterdam Road  
Apex Industrial  
Benoni • South Africa  
Tel. +27 (0)11 420 0274  
eMail: allen@articdriers.co.za

**ultrafilter  
Skandinavia ApS**

Sunekær 1  
5471 Sønder sø / Denmark  
Tel. +45(0) 82 303 020  
Email: info@ultra-filter.dk  
www.ultra-filter.dk

**ultrafilter G. Britain Ltd.**

90 Church Road  
Hereford  
HR1 1RS  
Tel. +44 (0) 1432 367 975  
eMail: sales@ultrafilter.uk.com

**PT ultrafilter Indonesia**

Jakarta 10570 • Indonesien  
Tel. +62-21 4280 0909  
Fax: +62 21 4280 0505  
eMail: info@ultrafilter.co.id  
www.ultrafilter.co.id

**ultrafilter Oy Finland**

Mukulakuja 4 A 7  
04300 Tuusula  
Finland  
www.ultra-filter.fi

Technical Alternations reserved



**Kronsbein ultrafilter**®

**ultrafilter gmbh**

Otto-Hahn-Str. 1 • 40721 Hilden • Germany  
Tel: +49 (0) 21 03.33 36 13 • Fax +49(0)21 03.33 36 36  
e-Mail: info@ultra-filter.de • www.ultra-filter.de