



ULTRAFILTER
THE FILTRATION MANUFACTURER

Kronsbein ultrafilter®



**ultrafilter high-performance filter
FF / MF / SMF with
ultra fibre technology**

Ultrafilter filter elements FF / MF / SMF

High performance filter ultrafilter

- ultrafilter high-performance depth filter for removal of water and oil aerosols as well as particles from compressed air and gases.
- Thanks to the unique combination of binderfree, non-woven ultra fibre filter media and pleating technology, a reduction in energy costs of 70 % is achieved, as well as an improved filtration performance.
- The new ultra fibre material from Ultrafilter is oleophobic, which means oil and water are actively rejected, so the differential pressure drop and therefore operation costs are reduced to a minimum compared with a conventional filter element.

Features	Benefits
Binderfree, thermally welded ultra filter media	Low differential pressure and high particle load
Oleophobic filter media	Rejects oil and water
Pleated filter media	450 % more filtration surface, higher particle load capacity, low air flow speed
Support sleeves of stainless steel (316L)	Extremely large free flow, secure and long operation

Type	Residual oil content at an inlet of		Residual oil content acc. ISO 12500-1
	3 mg/m ³	10 mg/m ³	
FF	<0,1 ppm	0,2 ppm	99,6 %
MF	<0,03 ppm	0,03 ppm	99,7 %

Validation:
Validation of ultrafilter high-performance filters by University Amberg


Advantages and benefits

- 450 % greater filter media compared to standard elements
- lower differential pressure
- improved filtration efficiency
- greater dirt-capturing capacity
- 70 % less energy costs

Applications

- chemical and petrochemical industry
- pharmaceutical industry
- food & beverage
- plastic industry
- process filtration
- instrumentation air

Materials	
Outer foam sock:	<ul style="list-style-type: none"> • blue polyurethane foam sock up to 80 °C • HT/CR sock up to 120 °C • HT/NX sock up to 180 °C
Support sleeved inner/outer:	stainless steel 304
Pre- and after filter medium:	pleated Cerex
Filter medium	binderfree ultra fibres of borosilicate
Bonding:	Polyurethane
End caps:	Aluminium
O-Rings:	Perbunan, silicon free and free of parting compounds

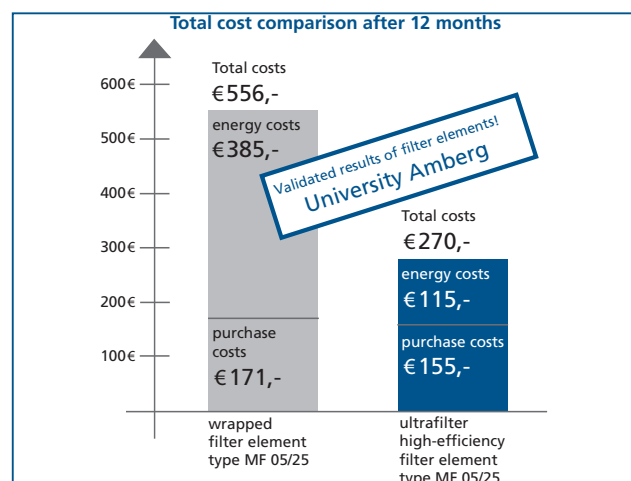

Ultrafilter filter elements FF / MF / SMF


Retention rate at a particle size of 0,01 µm:	
FF	99,999 %
MF	99,99998 %
SMF	99,99999 %

Start-up differential pressure:	
FF	0,04 bar
MF	0,08 bar
SMF	0,09 bar

Max. differential pressure:	
5 bar at 20 °C, independant from operation pressure	

Element size	Correction factor
02/05	0,04
03/05	0,08
03/10	0,12
04/10	0,17
04/20	0,19
05/20	0,25
05/25	0,32
07/25	0,47
07/30	0,68
10/30	1,0
15/30	1,55
20/30	2,10
30/30	3,28
30/50	5,90

Differential pressure of a MF/SMF filter element at trocken und oil containing compressed air (acc. ISO 12500-1).

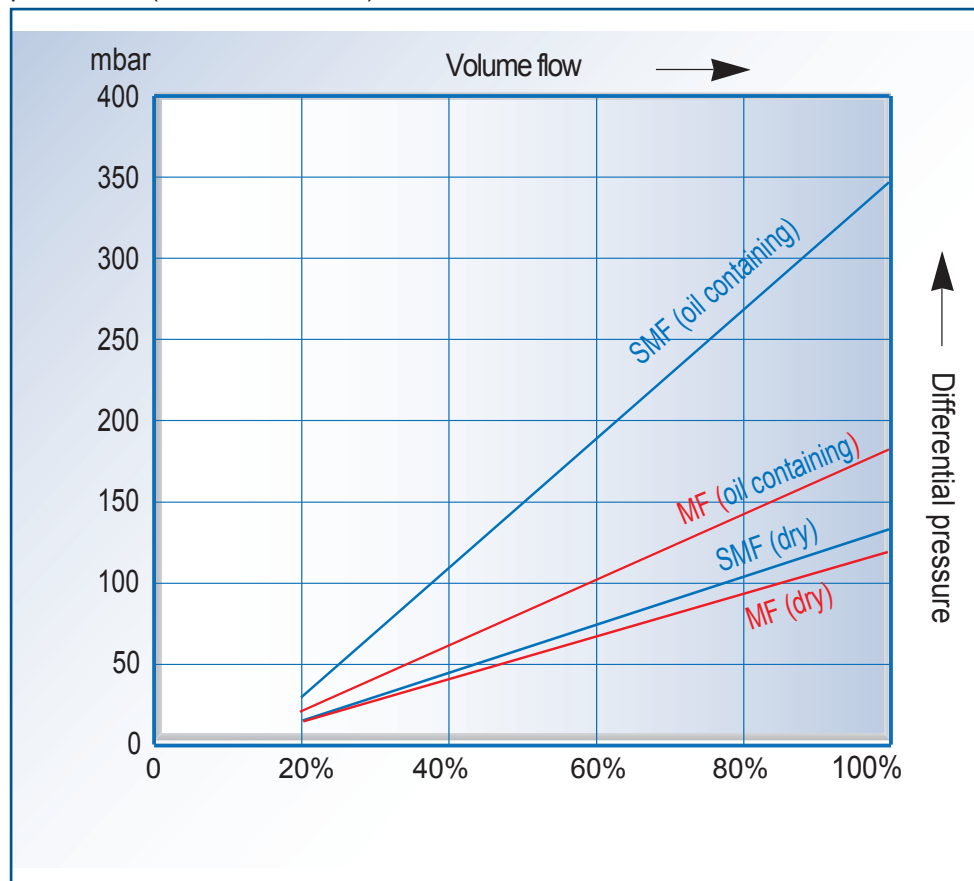

Technical alterations reserved.

**ultrafilter GmbH**

Otto-Hahn-Str. 1
40721 Hilden
Tel. +49 (0) 2103 33 36 0
Fax: +49 (0) 2103 33 36 36
eMail: info@ultra-filter.de
www.ultra-filter.de

**ultra.air AG**

Leutschenbachstrasse 45
8050 Zürich / Schweiz
Tel. +41 (0) 44 224 6060
Fax: +41 (0) 44 224 6061
eMail: info@ultraair.ch
www.ultraair.ch

**ultrafilter S.A. Mexico**

Tlalnepantla, Estado de México
Tel. +55 5362 8452
Fax: +55 5361-5444
eMail: contacto@solvik-int.com
www.solvik-int.com

**ultra.air GmbH**

Im Hülsenfeld 13
40721 Hilden
Tel. +49(0)2103 33 36 0
Fax: +49(0)2103 33 36 36
eMail: info@ultraair.de
www.ultraair.de

**ultra.air AG**

Leutschenbachstrasse 45
8050 Zürich / Schweiz
Tel. +41 (0) 44 224 6060
Fax: +41 (0) 44 224 6061
eMail: info@ultraair.ch
www.ultraair.ch

**ultrafilter USA Inc.**

Denver CO, USA
Tel. +1 (303) 321 3809
Fax +1 (720) 979 9640
eMail: info@ultrafilter.us
eMail: mike.lewis@ultra-filter.us
www.ultra-filter.us

**ultrafilter Ltd.
China**

Room 201, Xueyuan Road 16#
100083 Haidian Distric
Beijing • P.Republic of China
Tel. +86 10 8333 0822
Fax: +86 10 8115 9861
eMail: csfinox@yahoo.com.cn

**ultrafilter Ltd.
South Africa**

Artic Driers
12 Rotterdam Road
Apex Industrial
Benoni • South Africa
Tel. +27 (0)11 420 0274
eMail: allen@articdriers.co.za

**ultrafilter
Skandinavia ApS**

Sunekær 1
5471 Sønder sø / Denmark
Tel. +45(0) 82 303 020
Email: info@ultra-filter.dk
www.ultra-filter.dk

**ultrafilter G. Britain Ltd.**

90 Church Road
Hereford
HR1 1RS
Tel. +44 (0) 1432 367 975
eMail: sales@ultrafilter.uk.com

**PT ultrafilter Indonesia**

Jakarta 10570 • Indonesien
Tel. +62-21 4280 0909
Fax: +62 21 4280 0505
eMail: info@ultrafilter.co.id
www.ultrafilter.co.id

**ultrafilter Oy Finland**

Mukulakuja 4 A 7
04300 Tuusula
Finland
www.ultra-filter.fi

Technische Änderungen vorbehalten



Kronsbein ultrafilter®

ultrafilter gmbh

Otto-Hahn-Str. 1 • 40721 Hilden • Germany
Tel: +49 (0) 21 03.33 36 13 • Fax +49(0)21 03.33 36 36
e-Mail: info@ultra-filter.de • www.ultra-filter.de